


The First ADR Tanker SEMI-TRAILER Manufacturer of the Black Sea

TECHNICAL SPECIFICATION-DIAGRAM

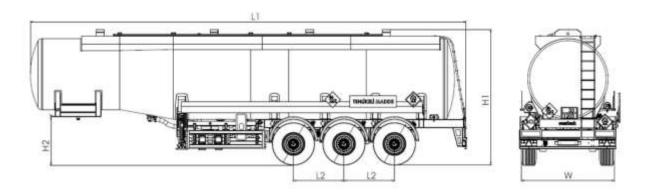

Tank type:	Cylindrical, designed for transportation and temporary storage of light petroleum products.
Tank material:	Steel 4 mm.
Number of hatch compartmets	5 compartments, 4 hatches.
Drain / Fill:	The drain fitting is located in the central part of the tank on the passenger side in the direction of travel. Upper.
Length L1:	13.600 mm.
Height H1:	4.000 mm.
Width W:	2.550 mm.
Tank volume:	40.000 liters.
Tank equipment:	Quick-release couplings 4. Pneumatic bottom valve 4-4 pcs. Drain fittings taps - 4 pcs. 4 filler hatches with 250 mm filler neck. Ladder behind the semi-trailer, non-slip path.
Priming and painting:	Semi-trailer painting - special treatment with preliminary priming and painting in one color with high-quality two-component polymer paint. Frame painting with enamel highly resistant to aggressive environments. Tank color - orange - white.
Axes L1-L2:	SAF-INTRA DISC - TURKISH AXIS. 3x9 ton. Front axle and rear axle lift. 1.310-1.350 mm.
Suspension:	Pneumatic (the system evenly dampens swings).
Brake system:	Braking system Wabco or Haldex SAF (Netherlands-Germany).
Support device:	The OMS support device is a two-speed, 25-ton lifting device with manual drive.
Tires and wheels:	Size 385/65 R22.5. Size 11.75 x 22.5. 6+1 pcs. Lassa, Petlas, Bridgestone, Good Year.
KingPin / SSU:	2 inches / height of the fifth wheel 1.200-1.250 mm.
Electrical equipment:	Electrical equipment SABA 24V (class 3 ADR). Two 7-pin sockets and one 15-pin socket for the electrical system. EBS socket; Wiring harnesses for connecting elements of the lighting and

Samsun Tanker Sanayi ve Tic. Ltd. Şti

Adres: Organize Sanayi Bölgesi Kızılırmak Cad. No:5 Tekkeköy/Samsun Türkiye

Tell: +90 (553) 862-89-93 / +90 (501) 912-32-18 (WhatsApp)



The First ADR Tanker SEMI-TRAILER Manufacturer of the Black Sea

	signaling system; Two rear combination lights that function as parking lights.
Accessories:	Direction indicators, brake lights, fog lights, reversing lights and state registration plate lighting. Two full-size lights on a flexible base. Two front sidelights, combined with white reflectors. Sidelights, combined with orange reflectors. Two rear red reflectors.
Mounting accessories:	Toolbox -1 pc. Spare wheel mount or basket -1 pc. Water barrel with tap and liquid soap dispenser – 1 pc. Red fire compartments (with fire extinguishers) – 2 pcs. Cases for hoses (with 1 hose included) – 2 pcs. Anti-roll shoe – 2 pcs. Non-slip walkway made of profiled decking on top of the tank. Hinges on the hatch are located on the opposite side from the tractor; Ladder at the rear of the tank with steps that prevent slipping. Rising handrails with mechanical control.